

# Cisco Aironet Antennas and Accessories—Complete the Wireless Solution

Cisco offers a complete range of antennas for client adapter, access point, and bridge equipment that enable a customized wireless solution for almost any installation.

## Cisco Aironet Antennas and Accessories

Every wireless Local Area Network (LAN) deployment is different. When engineering an in-building solution, varying facility sizes, construction materials, and interior divisions raise a host of transmission and multipath considerations. When implementing a building-to-building solution, distance, physical obstructions between facilities, and number of transmission points must be taken into account.

Cisco is committed to providing not only the best access points, client adapters, and bridges in the industry—it is also committed to providing a complete solution for any wireless LAN deployment. That's why Cisco has the widest range of antennas, cable, and accessories available from any wireless manufacturer.

Figure 1 Cisco offers a complete range of 2.4 GHz antennas for client adapter, access point, and bridge equipment that enable a customized wireless solution for almost any installation.





With the Cisco FCC-approved directional<sup>1</sup> and omnidirectional<sup>2</sup> antennas, low-loss cable, mounting hardware, and other accessories, installers can customize a wireless solution that meets the requirements of even the most challenging applications.

1. An antenna that concentrates transmission power into a direction that increases coverage distance at the expense of coverage angle. Directional antenna types include yagi, patch, and parabolic dish antennas. A yagi is a type of cylindrical directional antenna. A patch antenna is a type of flat antenna designed for flush wall mounting that radiates a hemispherical coverage area. A parabolic dish antenna is a concave or dish-shaped object. Often refers to dish antennas. Parabolic dish antennas tend to provide the greatest gain and the narrowest beam width making them ideal for point-to-point transmission over the longest distances.
2. An antenna that provides a 360-degree transmission pattern. These types of antennas are used when coverage in all directions is required.

### Client Adapter Antenna

Cisco Aironet wireless client adapters come complete with standard antennas that provide sufficient range<sup>3</sup> for most applications at 11 Mbps. To extend the transmission range for a more specialized application when using the LMC adapter, a higher-gain<sup>4</sup> antenna is offered. (See Table 1.)

3. A linear measure of the distance that a transmitter can send a signal.
4. A method of increasing the transmission distance of a radio by the concentration of its signal in a single direction, typically through the use of a directional antenna. Gain does not increase the signal strength of a radio, but simply redirects it. Therefore, as gain increases, the decrease in angle of coverage is inversely proportional

Table 1 Cisco Aironet Client Antenna Features



Feature	AIR-ANT3351
Description	POS diversity dipole <sup>1</sup>
Application	Indoor diversity antenna <sup>2</sup> to extend the range of Aironet LMC client adapters
Gain	2.2 dBi <sup>3</sup>
Approximate Indoor Range at 1 Mbps <sup>4</sup>	350 ft. (107 m)
Approximate Indoor Range at 11 Mbps <sup>4</sup>	100 ft. (51 m)
Beam Width	360 H 75 V
Cable Length	5 ft. (1.5 m)
Dimensions	Base: 7 x 2 in. (18 x 5 cm) Height: 8 in. (20 cm)
Weight	9.2 oz. (261 g)

1. A type of low-gain (2.2 dBi) antenna consisting of two (often internal) elements.
2. An intelligent system of two antennas that continually senses incoming radio signals and automatically selects the antenna best positioned to receive it.
3. A ratio of decibels to an isotropic antenna that is commonly used to measure antenna gain. The greater the dBi value, the higher the gain and, as such, the more acute the angle of coverage.
4. All range estimations are based on an integrated client adapter antenna associating with an access point under ideal indoor conditions. The distances referenced here are approximations and should be used for estimation purposes only.




## Access Point Antennas

Cisco Aironet access point antennas are compatible with all Cisco RP-TNC-equipped access points. The antennas are available with different gain and range capabilities, beam

widths<sup>5</sup>, and form factors. Coupling the right antenna with the right access point allows for efficient coverage in any facility, as well as better reliability at higher data rates. (See Table 2.)

5. The angle of signal coverage provided by a radio; it may be decreased by a directional antenna to increase gain.

Table 2 Cisco Aironet Access Point Antenna Features



Feature	AIR-ANT5959	AIR-ANT2012	AIR-ANT3213	AIR-ANT2410Y-R
<b>Description</b>	Diversity omnidirectional ceiling mount	Diversity patch wall mount	Pillar mount diversity omnidirectional	Yagi mast or wall mount
<b>Application</b>	Indoor unobtrusive antenna, best for ceiling mount. Excellent throughput and coverage solution in high multipath cells and dense.	Indoor/Outdoor, unobtrusive medium range antenna	Indoor, unobtrusive medium-range antenna	Indoor/Outdoor directional antenna for use with Access Points or Bridges
<b>Gain</b>	Two separate 2 dBi omnidirectional elements. Minimum gain 2.0. Maximum 2.35 gain.	6.5 dBi with two radiating elements	5.2 dBi with two radiating elements	10 dBi
<b>Approximate Indoor Range at 1 Mbps<sup>1</sup></b>	350 ft. (105 m)	547 ft. (167 m)	497 ft. (151 m)	800 ft. (244 m)
<b>Approximate Indoor Range at 11 Mbps<sup>1</sup></b>	130 ft. (45 m)	167 ft. (51 m)	142 ft. (44 m)	230 ft. (70 m)
<b>Beam Width</b>	360 H 80 V	80 H 55 V	360 H 30 V	47 H 55 V
<b>Cable Length</b>	3 ft. (0.91 m) <sup>2</sup>	3 ft. (0.91 m) <sup>2</sup>	3 ft. (0.91 m)	3 ft. (0.91 m)
<b>Dimensions</b>	5.3 x 2.8 x 0.9 in. (13.5 x 7.1 x 2.3 cm)	4.78 x 6.66 x .82 in. (12.14 x 16.92 x 2.08 cm)	10 x 1 in. (25.4 x 2.5 cm)	7.25 x 5 in. (18.4 x 12.7 cm)
<b>Weight</b>	0.3 lbs. (0.14 kg)	9.6 oz. (272 g)	1 lb. (460 g)	8 oz.

1. All range estimations are based on an external antenna associating with an integrated client adapter antenna under ideal indoor conditions. The distances referenced here are approximations and should be used for estimation purposes only.

2. The cable provided on noted antennas meets UL 2043 certification for plenum rating requirements set by local fire codes supports installation in environmental air spaces such as areas above suspended ceilings.



Table 2 Cisco Aironet Access Point Antenna Features (continued)



Feature	AIR-ANT1728	AIR-ANT4941	AIR-ANT3549	AIR-ANT1729
<b>Description</b>	Omnidirectional ceiling mount	2.2 dBi dipole antenna	Patch wall mount	Patch wall mount
<b>Application</b>	Indoor medium-range antenna, typically hung from crossbars of drop ceilings	Indoor omnidirectional coverage	Indoor, unobtrusive, long-range antenna (may also be used as a medium-range bridge antenna)	Indoor/outdoor, unobtrusive, medium-range antenna (may also be used as a medium-range bridge antenna)
<b>Gain</b>	5.2 dBi	2.2 dBi	9 dBi	6 dBi
<b>Approximate Indoor Range at 1 Mbps<sup>1</sup></b>	497 ft. (151 m)	350 ft. (106 m)	Access Point: 700 ft. (213 m)	Access Point: 542 ft. (165 m)
<b>Approximate Indoor Range at 11 Mbps<sup>1</sup></b>	142 ft. (44 m)	130 ft. (40 m)	Access Point: 200 ft. (61 m) Bridge: 3390 ft. (1032 m)	Access Point: 155 ft. (47 m) Bridge: 1900 ft. (580 m)
<b>Beam Width</b>	360° H 38° V	360° H 65° V	60° H 60° V	75° H 65° V
<b>Cable Length</b>	3 ft. (0.91 m)	N/A	3 ft. (0.91 m)	3 ft. (0.91 m)
<b>Dimensions</b>	Length: 9 in. (22.86 cm) Diameter: 1 in. (2.5 cm)	5.5 in. (14 cm)	5 x 5 in. (12.4 x 12.4 cm)	4 x 5 in. (9.7 x 13 cm)
<b>Weight</b>	4.6 oz. (131 g)	1.1 oz (31 g)	5.3 oz. (150 g)	4.9 oz. (139 g)



## Bridge Antennas

Cisco Aironet bridge antennas allow for extraordinary transmission distances between two or more buildings. Available in directional configurations for point-to-point

transmission and omnidirectional configuration for point-to-multipoint implementations, Cisco has a bridge antenna for every application. (See Table 3.)

Table 3 Cisco Aironet Bridge Antenna Features




Feature	AIR-ANT2506	AIR-ANT24120	AIR-ANT1949	AIR-ANT3338
<b>Description</b>	Omnidirectional mast mount	High-gain omnidirectional mast mount	Yagi mast mount	Solid dish
<b>Application</b>	Outdoor short-range point-to-multipoint applications	Outdoor medium-range point-to-multipoint applications	Outdoor medium-range directional connections	Outdoor long-range directional connections
<b>Gain</b>	5.2 dBi	12 dBi	13.5 dBi	21 dBi
<b>Approximate Range at 2 Mbps<sup>1</sup></b>	5000 ft. (1525 m)	4.6 miles (7.4 km)	6.5 miles (10.5 km)	25 miles (40 km)
<b>Approximate Range at 11 Mbps<sup>1</sup></b>	1580 ft. (480 m)	1.4 miles (2.3 km)	2.0 miles (3.3 km)	11.5 miles (18.5 km)
<b>Beam Width</b>	360 H 38 V	360 H 7 V	30 H 25 V	12.4 H 2.4 V
<b>Cable Length</b>	3 ft. (0.91 m)	1 ft. (0.30 m)	3 ft. (0.91 m)	2 ft. (0.61 m)
<b>Dimensions</b>	Length: 13 in. (33 cm) Diameter: 1 in. (2.5 cm)	Length: 42 in. (103 cm) Diameter: 1.5 in. (3 cm)	Length: 18 in. (46 cm) Diameter: 3 in. (7.6 cm)	Diameter 24 in. (61 cm)
<b>Weight</b>	6 oz. (17 g)	1.5 lb. (0.68 kg)	1.5 lb. (0.68 kg)	11 lb. (5 kg)

1. All range estimations are based on use of 50 foot (15m) low-loss cable and the same type of antenna at each end of the connection under ideal outdoor conditions. The distances referenced here are approximations and should be used for estimation purposes only.



Figure 2 Optional, higher-gain antennas can be used to extend the range of access points.

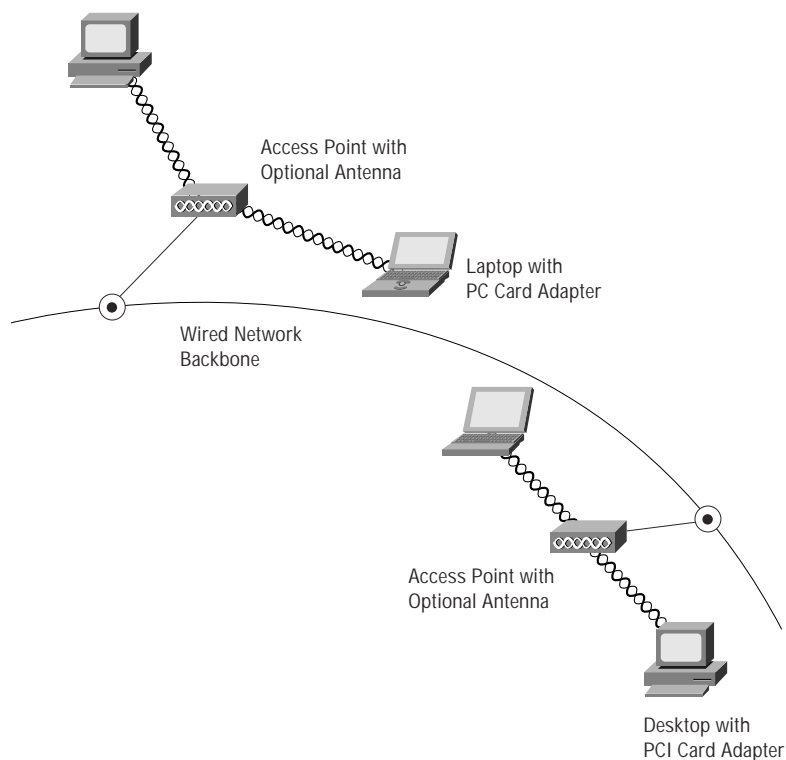


#### Low Loss/Ultra Low Loss Cables

Low-loss cable extends the length between any Cisco Aironet bridge and the antenna. With a loss of 6.7 dB per 100 feet (30m) for the low-loss cable and 4.4 dB for the ultra low-loss cable, this provides installation flexibility without a significant sacrifice in range. (See Table 4.)

Table 4 Cisco Aironet Low-Loss Antenna Cable Features

Feature	AIR-CAB020LL-R	AIR-CAB050LL-R	AIR-CAB100ULL-R	AIR-CAB150ULL-R
Cable Length	20 ft. (6 m)	50 ft. (15 m)	100 ft. (30 m)	150 ft. (46 m)
Transmission Loss	1.3 dB	3.4 dB	4.4 dB	6.6 dB

Figure 3 With Cisco Aironet bridge antennas, the right mounting hardware, and qualified installation, wireless links over great distances and obstacles are possible.

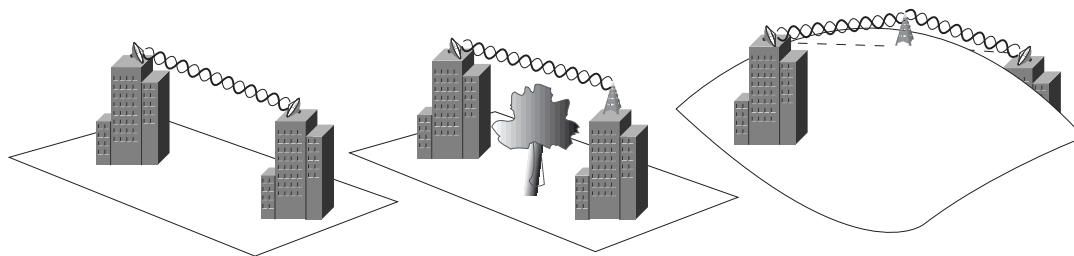

Accessories

Figure 4 Cisco Aironet Antenna Accessories

To complete an installation, Cisco provides a variety of accessories that offer increased functionality, safety, and convenience. (See Table 5.)



Table 5 Cisco Aironet Accessory Features

Feature	AIR-ACC2537-060	AIR-ACC3354	AIR-ACC2662	AIR-420-1625-050
Description	60 in. (152 cm) bulkhead extender	Lightning arrestor	Yagi articulating mount	5 in. (12.7 cm) Antenna converter cable: MMCX to RP-TNC connector
Application	Flexible antenna cable that extends access point cabling typically within an enclosure	Helps prevent damage due to lightning-induced surges or static electricity	Adds swiveling capability to mast-mounted yagi antennas	For use with Aironet LMC client adapters which need high gain antenna options.

Switzerland • **OPAL Associates AG** • Motorenstrasse 116 • CH-8620 **Wetzikon** • Telefon +41 (0)1 931 12 22 • Telefax +41 (0)1 931 12 20 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • URL <http://www.opal.ch/> • OPAL Associates SA • Avenue des Boveresses 54 • Case postale 29 • CH 1000 **Lausanne** 21 • Telefon +41 (0)21 653 95 00 • Telefax +41 (0)21 653 95 02 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • URL <http://www.opalsa.ch/> • Germany • **OPAL Associates GmbH** • Lohnerhofstrasse 2 • D-78467 **Konstanz** Telefon +49 (0)7531 813 000 • Telefax +49 (0)7531 813 00 99 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • URL <http://www.opalgbmh.de/> • OPAL Associates GmbH • Osterholder Allee 2 • 25421 **Pinneberg** • Telefon +49 (0)4101 787 615 • Telefax +49(0)4101 787 616 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • OPAL Associates GmbH • **München** • Telefon +49 (0)89 12737 556 • Telefax +49 (0)89 12737 557 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • OPAL Associates GmbH • **Frankfurt** • Telefon +49 (0)69 8236 6501 • Telefax +49 (0)69 8236 7709 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • OPAL Solutions GmbH • Wilhelmstr. 22 • 52428 **Jülich** • Telefon +49 (0)2461 936 770 • Telefax +49(0)2461 936 771 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • URL <http://www.opal-solutions.de/> • Austria • **OPAL Associates GesmbH** • Vorarlberger Wirtschaftspark • A-6840 **Göttzis** • Telefon +43 (0) 5523 58833 • Telefax +43 (0)5523 521569 • Email [info@opal-holding.com](mailto:info@opal-holding.com) • URL <http://www.opalgbmh.at/> • OPAL Associates GesmbH • **Wien** • Telefon +43 (0)1 270 03 13 • Telefax +43(0)1 270 03 15 • Email [info@opalgbmh.at](mailto:info@opalgbmh.at)



Corporate Headquarters  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

European Headquarters  
Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
[www-europe.cisco.com](http://www-europe.cisco.com)  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

Americas Headquarters  
Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
[www.cisco.com](http://www.cisco.com)  
Tel: 408 526-7660  
Fax: 408 527-0883

Asia Pacific Headquarters  
Cisco Systems, Inc.  
Capital Tower  
168 Robinson Road  
#22-01 to #29-01  
Singapore 068912  
[www.cisco.com](http://www.cisco.com)  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the Cisco Web site at [www.cisco.com/go/offices](http://www.cisco.com/go/offices)

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia  
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland  
Israel • Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland  
Portugal • Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden  
Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

All contents are Copyright © 1992–2003 Cisco Systems, Inc. All rights reserved. Aironet, Cisco, Cisco IOS, Cisco Systems, and the Cisco Systems logo are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries.  
All other trademarks mentioned in this document or Web site are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0304R)